





LED element, white, front mount, 12-30VAC/DC

Part no. **M22-LED-W**
 Article no. **216557**
 Catalog No. **M22-LED-WQ**

Delivery programme

Product range			RMQ-Titan (drilling dimensions 22.5 mm)
Basic function			LED elements
Single unit/Complete unit			Single unit
Fixing			Front fixing
Connection technique			Screw terminals
Rated operational voltage	U_e	V	12 - 30 V AC/DC, 50/60 Hz
Rated operational current	I_e	mA	8 - 15
Power consumption	$P_{max.}$	W	0.26 at 24 V
Colour			
			
			White
Degree of Protection			IP20
Front ring			- N/A -
Connection to SmartWire-DT			no

Technical data

General			
Standards			IEC/EN 60947 VDE 0660
Operating torque (screw terminals)		Nm	 0.8
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +70
Storage		°C	-40 - +80
Mounting position			As required
Mechanical shock resistance		g	30 Shock duration 11 ms Sinusoidal according to IEC 60068-2-27
Terminal capacities		mm ²	
Solid		mm ²	0.75 - 2.5
Stranded		mm ²	0.5 - 2.5

Contacts

Rated impulse withstand voltage	U_{imp}	V AC	6000
Rated insulation voltage	U_i	V	500
Overvoltage category/pollution degree			III/3
Indoor and protected outdoor installation			

Design verification as per IEC/EN 61439

Technical data for design verification				
Rated operational current for specified heat dissipation	I_n	A	0	
Heat dissipation per pole, current-dependent	P_{vid}	W	0	
Equipment heat dissipation, current-dependent	P_{vid}	W	0	
Static heat dissipation, non-current-dependent	P_{vs}	W	0.45	
Heat dissipation capacity	P_{diss}	W	0	
Operating ambient temperature min.		°C	-25	
Operating ambient temperature max.		°C	70	
IEC/EN 61439 design verification				
10.2 Strength of materials and parts				
10.2.2 Corrosion resistance				
			Meets the product standard's requirements.	
10.2.3.1 Verification of thermal stability of enclosures				
			Meets the product standard's requirements.	
10.2.3.2 Verification of resistance of insulating materials to normal heat				
			Meets the product standard's requirements.	
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects				
			Meets the product standard's requirements.	
10.2.4 Resistance to ultra-violet (UV) radiation				
			Meets the product standard's requirements.	
10.2.5 Lifting				
			Does not apply, since the entire switchgear needs to be evaluated.	
10.2.6 Mechanical impact				
			Does not apply, since the entire switchgear needs to be evaluated.	
10.2.7 Inscriptions				
			Meets the product standard's requirements.	
10.3 Degree of protection of ASSEMBLIES				
			Does not apply, since the entire switchgear needs to be evaluated.	
10.4 Clearances and creepage distances				
			Meets the product standard's requirements.	
10.5 Protection against electric shock				
			Does not apply, since the entire switchgear needs to be evaluated.	
10.6 Incorporation of switching devices and components				
			Does not apply, since the entire switchgear needs to be evaluated.	
10.7 Internal electrical circuits and connections				
			Is the panel builder's responsibility.	
10.8 Connections for external conductors				
			Is the panel builder's responsibility.	
10.9 Insulation properties				
10.9.2 Power-frequency electric strength				
			Is the panel builder's responsibility.	
10.9.3 Impulse withstand voltage				
			Is the panel builder's responsibility.	
10.9.4 Testing of enclosures made of insulating material				
			Is the panel builder's responsibility.	
10.10 Temperature rise				
			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.	
10.11 Short-circuit rating				
			Is the panel builder's responsibility. The specifications for the switchgear must be observed.	
10.12 Electromagnetic compatibility				
			Is the panel builder's responsibility. The specifications for the switchgear must be observed.	
10.13 Mechanical function				
			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.	


Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Lamp holder block for control circuit devices (EC000204)				
Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Bulb socket block for command and alarm devices (ec@ss8.1-27-37-12-09 [AKF027011])				
With integrated transformer				No
With integrated voltage decreasing resistor				No
With integrated lamp				Yes
With integrated diode				Yes
Lamp holder				None
Rated voltage U_e at AC 50 Hz		V	0 - 0	
Rated voltage U_e at AC 60 Hz		V	0 - 0	
Rated voltage U_e at DC		V	30 - 30	
Voltage type for actuating				AC/DC
Type of lamp				LED
Connection type auxiliary circuit				Screw connection
Colour lamp				White
Type of fastening				Front fastening

Approvals

Product Standards		IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
UL File No.		E29184
UL Category Control No.		NKCR
CSA File No.		012528
CSA Class No.		3211-03
North America Certification		UL listed, CSA certified
Degree of Protection		UL/CSA Type: -

Dimensions

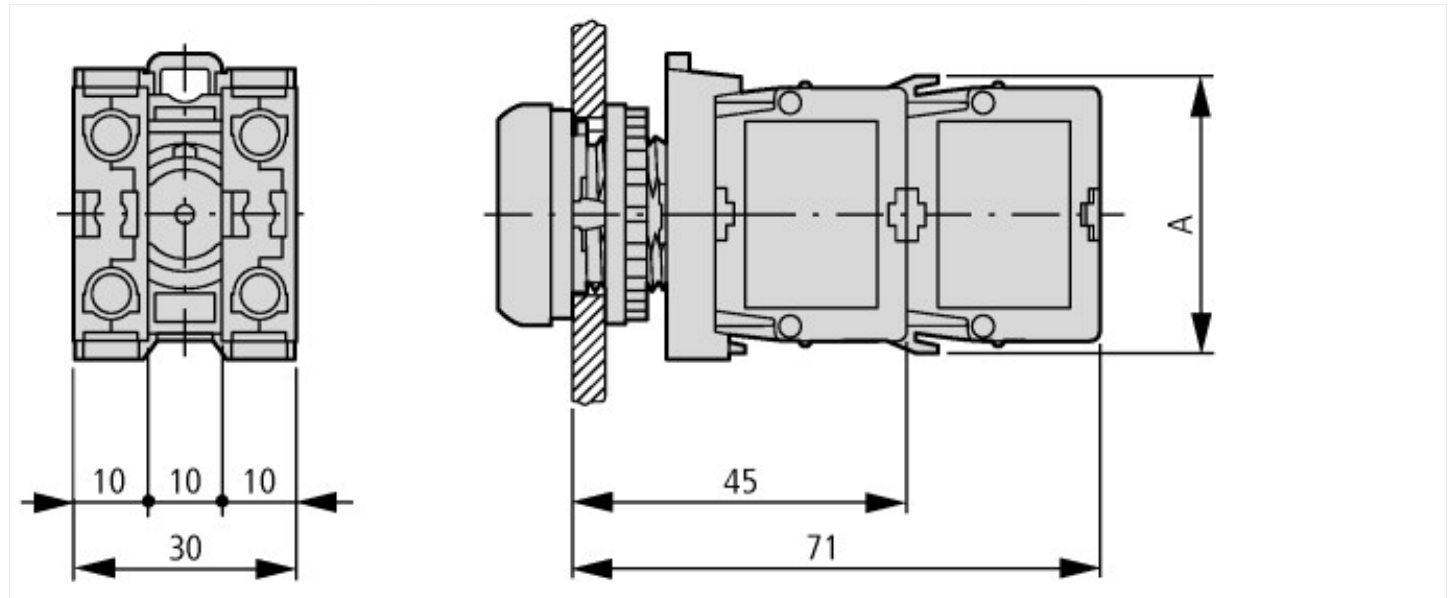

A = 37.2

Pushbutton with M22-(C)K...

Pushbutton with M22-(C) LED... + M22-XLED...

Additional product information (links)

IL04716002Z (AWA1160-1745) RMQ-Titan System

IL04716002Z (AWA1160-1745) RMQ-Titan System

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716002Z2015_02.pdf